

Read all instructions before starting. Seam allowances are 1/4" WOF - Width of Fabric HST - half square triangle.

Supplies:

- 7 assorted red and blue fat quarters
- 3/4 yard of background
- 1/4 yard of binding
- 30" x WOF of backing

CUTTING


From Background:

- 4 - 3 1/4" x 3 1/4" squares (A)
- 1 - 4 3/8" x 4 3/8" square (B)
- 4 - 3 1/4" x 6" rectangles (C)
- 8 - 3 1/4" x 3 1/4" squares (D)
- 4 - 3 3/4" x 3 3/4" squares (E)
- 2 - 1 1/2" x 17" strips (F)
- 2 - 1 1/2" x 19" strips (G)

From Navy:

- 4 - 3 1/4" x 6" rectangles (H)
- 8 - 3 1/4" x 3 1/4" squares (I)


From Red :

- 4 - 3 1/4" x 3 1/4" squares (J)
- 4 - 3 3/4" x 3 3/4" squares (K)
- 2 - 3 3/4" x 3 3/4" squares, cut diagonally (L) 

From assorted prints:


- 4 - 3" x 3" squares (M)
- 16 - 3" x 5 1/8" rectangles (N)

BLOCK DIAGRAM

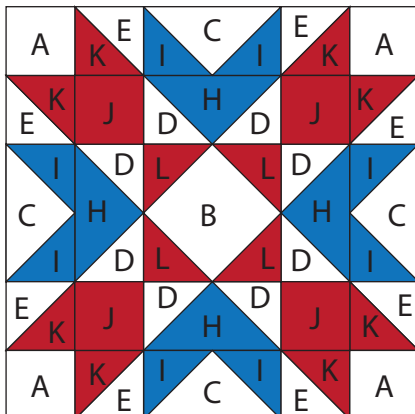


BLOCK ASSEMBLY


- Step 1:** Draw a guideline from corner to corner on the wrong sides of all E squares. Place an E square and a K square right sides together. Stitch a 1/4" on either side of marked guideline. With a rotary cutter and ruler, cut on your guideline. This method will yield 2 HST units.
- Trim HST units to 3 1/4" x 3 1/4" square.**
- Make 8 "K" HST units.**



- Step 2:** Sew K HST units to an A square and a J square to make a 4 patch. Press. **Make 4 - four patch units.**

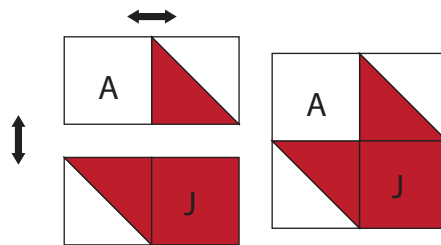


- Step 3:** Draw a guideline from corner to corner on the wrong side of all I squares. Place an I square along one end of a C rectangle, right sides together, and stitch along previously marked guideline (the dotted line in the diagram). With a rotary cutter and ruler, trim excess fabric, leaving a 1/4" seam allowance, and press I fabric out. Repeat on the other end of the C rectangle to complete the flying geese unit.
- Make 4 "I" flying geese units.**




Step 4: Draw a guideline from corner to corner on the wrong side of all D squares. Place a D square along one end of an H rectangle, right sides together, and stitch along previously marked guideline (the dotted line in the diagram). With a rotary cutter and ruler, trim excess fabric, leaving a 1/4" seam allowance, and press D fabric out. Repeat on the other end of the H rectangle to complete the flying geese unit.

Make 4 "H" flying geese units.




Step 5: Sew I and H flying geese units together to make one unit. Press. **Make 4 units.**




Step 6: Take a B square and two L triangles. Find the center of your triangle, and line it up with the center of your B square. Sew an L triangle to the top and one to the bottom of your B square. Press. Do not trim off the excess of your L triangles, you want the overage so that you won't lose your points later on.

Take your two remaining L triangles and follow the same steps, as above to sew L triangles to the left and right of your B square. Press.


Trim to 6" x 6" Make 1

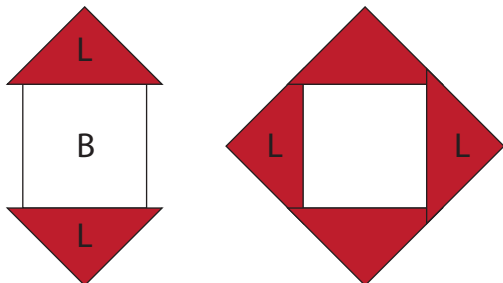


Step 7: Sew blocks into rows of three as pictured below. Press.

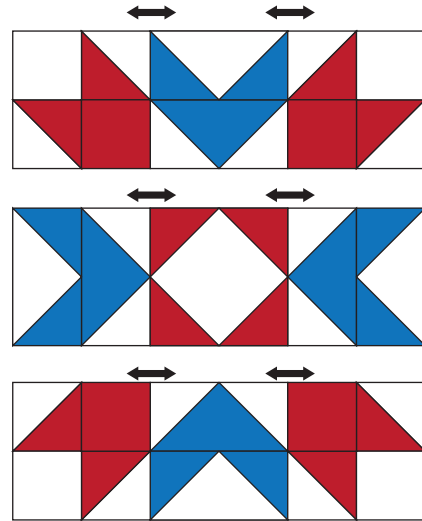

Step 8: Sew rows together to form your block. **Block will measure 17" x 17"**

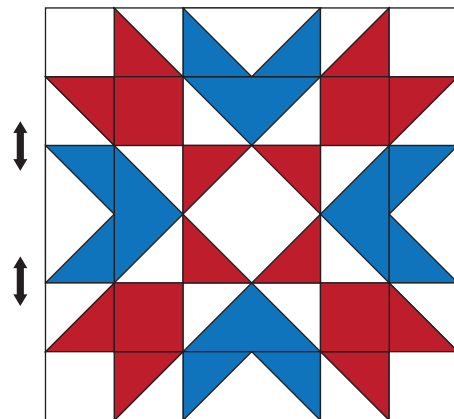


Step 9: Sew together various N rectangles and make 4 sets of 4 rectangles. Press. Sew an M square to the left and right side of two of the strip sets. Press.

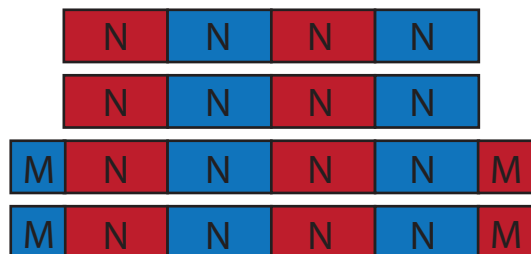


QUILT ASSEMBLY


Step 10: Sew F border strip to the left and right side. Press. Sew G border strip to the top and bottom press.

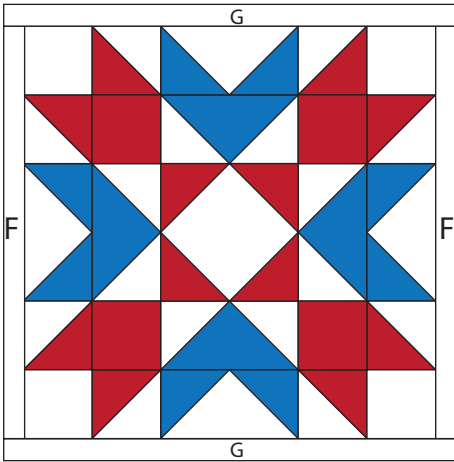

Step 11: Sew a pieced border strip to the top and bottom of your quilt top and press.

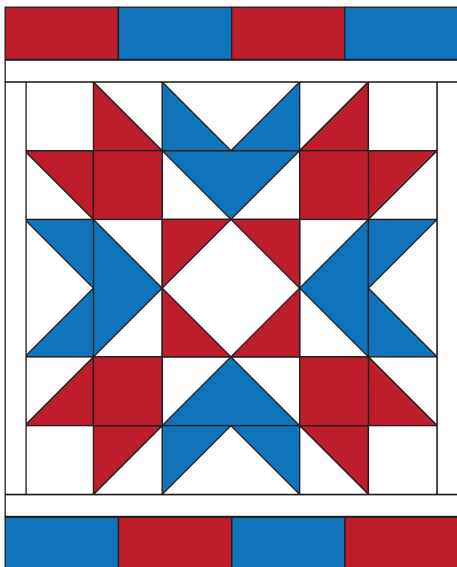

Step 12: Sew the remaining border strips with M squares to the left and right sides. Press.

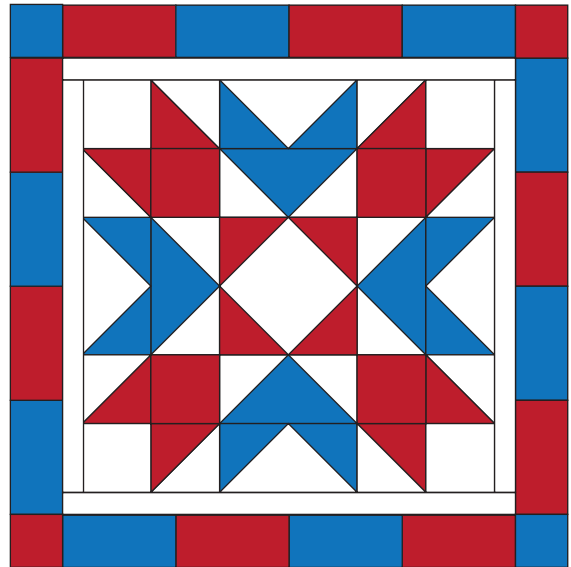

Step 13: Baste, quilt, and bind with your preferred methods. **Finished size: 23.5" x 23.5"**



For more free projects and tutorials visit: www.fortworthfabricstudio.blogspot.com