

44" x 44"



Designed By: QT Fabrics

Designed by: QT Fabrics





Finished Size: 44" x 44"

FABRIC REQUIREMENTS

	Fabric A 27056 N 11/8 YARDS 1 BOLT		Fabric B 27056 B 5/8 YARD 1 BOLT		Fabric C 27058 Z 5/8 YARD 1 BOLT		Fabric D* 27058 B 7/8 YARD 1 BOLT
	Fabric E 27057 N 3/8 YARD 1 BOLT		Fabric F 24299 S 1/4 YARD 3 BOLTS		Fabric G** 27057 B 3 YARDS 3 BOLTS	* includes binding ** backing only	

* Numbers within gray box = Number of Bolts needed to make 12 Kits

We recommend that you carefully read through all instructions before getting started on your project.

CONSTRUCTION

All measurements include ¼" seam allowances.

CUTTING DIRECTIONS

Note:

All strips are cut across the width of the fabric (perpendicular to the selvages) unless noted otherwise. All seams are ¼".

WOF = Width of fabric (from selvage to selvage)

LOF = length of fabric (parallel to selvage)

Fabric A, cut:

- (2) 4½" x 40½" LOF strips. Subcut (2) 4½" x 36½" side border strips.

From remainder of Fabric A, cut:

- (4) 4½" x 30" WOF strips.
- (1) 12½" square.

Fabric B, cut:

- (1) 6½" x WOF strip. Subcut (4) 6½" squares.
- (1) 13¼" square. Cut square diagonally in both directions to yield 4 quarter-square triangles.

Fabric C, cut:

- (1) 6⅞" x WOF strip. Subcut (4) 6⅞" squares. Cut squares in half diagonally to yield 8 half-square triangles.
- (2) 3⅞" x WOF strips. Subcut (20) 3⅞" squares. Cut squares in half diagonally to yield 40 half-square triangles.

Fabric D, cut:

- (4) 3½" x WOF strips. Subcut (4) 3½" x 24½" strips.
- (5) 2¼" x WOF strips for binding.

Fabric E, cut:

- (1) 7¼" x WOF strip. Subcut (5) 7¼" squares. Cut squares diagonally in both directions to yield 20 quarter-square triangles.

Fabric F, cut:

- (1) 3½" x WOF strip. Subcut (8) 3½" squares.


QUILT CENTER ASSEMBLY

Refer to the quilt illustration for direction of prints

1. Sew a Fabric C triangle to a Fabric B triangle as shown. Press the seam allowance toward the Fabric C triangle. Add another Fabric C triangle to complete a Flying Geese unit. Press. The unit should measure 6½" x 12½". Make 4 units as shown.




2. Lay out the 12½" Fabric A square, Flying Geese units, and 6½" Fabric B squares as shown. Sew the pieces into rows, and then join the rows to complete the quilt center. The quilt center should measure 24½" square, including seam allowances.

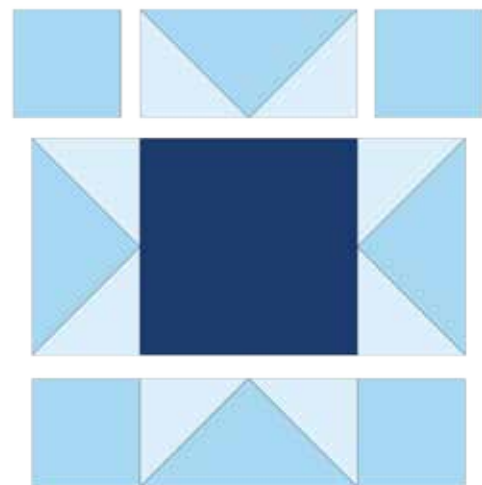

FLYING GEESE BORDER ASSEMBLY

1. Make 20 Flying Geese units, using the Fabric E triangles and $3\frac{7}{8}$ " Fabric C triangles as shown. The units should measure $3\frac{1}{2}$ " x $6\frac{1}{2}$ ".

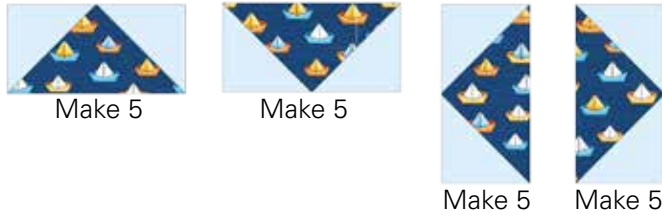

2. Referring to the Quilt Assembly Diagram, join 5 matching Flying Geese units to make a border. Make 4 Flying Geese borders.

QUILT ASSEMBLY

Refer to the Quilt Assembly Diagram for the following steps.

1. Add two $3\frac{1}{2}$ " x $24\frac{1}{2}$ " Fabric D strips to the sides of the quilt center.
2. Sew a $3\frac{1}{2}$ " Fabric F square to each end of the remaining Fabric D strips. Sew the pieced strips to the top and bottom of the quilt center. The quilt should measure $30\frac{1}{2}$ " square.
3. Sew the Flying Geese side borders to the quilt.
4. Sew a $3\frac{1}{2}$ " Fabric F square to each end of the top and bottom Flying Geese borders. Sew the borders to the quilt.
5. Sew the $4\frac{1}{2}$ " x $36\frac{1}{2}$ " Fabric A strips to the sides of the quilt.
6. Sew (2) $4\frac{1}{2}$ " x 30" strips together end to end. Trim to make a $4\frac{1}{2}$ " x $44\frac{1}{2}$ " border. Make 2 borders. Sew the borders to the top and bottom of the quilt.

FINISHING

1. Cut the backing fabric into 2 (1 $\frac{1}{2}$ -yard) pieces. Join the pieces lengthwise.
2. Layer backing, batting, and quilt top. Baste. Quilt as desired.
3. Make double-fold binding using the $2\frac{1}{4}$ "-wide Fabric D strips. Sew binding to quilt using your preferred method.



Quilt Assembly Diagram

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.